


NOTE:

1. Contractor to provide blockout free of voids and honeycombs.
2. Contractor to provide 1/4" radius tooled edge along blockout at driving surface.
3. Blockout base to be at same elevation on both sides of stem opening.
4. SES model seals all use an offset blockout with a 4" constant width on the fixed side.

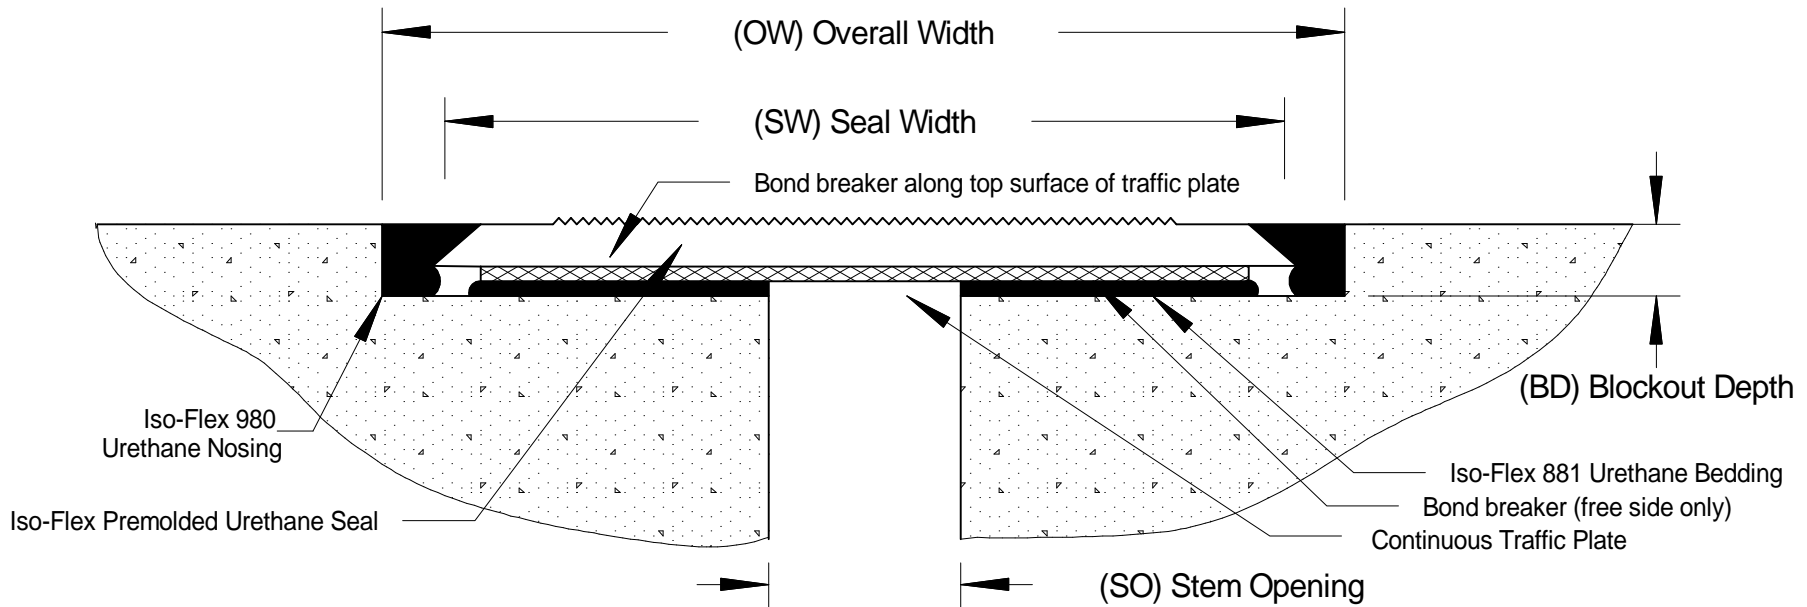

System Type	Overall Width (OW)	Seal Width (SW)	Max. Stem Opening (SO)	Blockout Depth (BD)	Expected Mvmt.	Plate Size
TS30	4"	3"	3/4"	5/8"	1/2"	2-1/4" x .06
TS40	5"	4"	1"	5/8"	3/4"	3-1/2" x .06
TS60	7"	6"	1-1/2"	5/8"	1"	5" x .09
TS80	9"	8"	2-1/4"	5/8"	1-1/2"	6-1/2" x .09
TS100	11"	10"	3"	3/4"	2"	8" x .125
TS120	13"	12"	3"	3/4"	2-1/2"	8" x .125
SES140	16"	14"	4"	3/4"	2"	10" x .125"
SES160	18"	16"	5"	3/4"	2-1/2"	12" x .160"
SES180	20"	18"	6"	3/4"	3"	12" x .160"
SES240	26"	24"	8"	3/4"	4"	14" x .190"
SES280	30"	28"	10"	1"	5"	16" x .25"
SES320	34"	32"	12"	1"	6"	18" x .25"

LymTal International, Inc.

Scale: NTS

Drawn By: GAB

Date: 6-12-01

Revised: 3/04

Iso-Flex Factory Molded Expansion Joint System

Drawing Number: 1054-03